




Features

1. Advanced design, reasonable structure, convenient operation and maintenance.
2. Precise positioning with servo film running system and synchronous belts to pull film, ensuring stability and reliability.
3. Automatic correcting function; time and film saving to improve the reliability and intelligence of the whole machine.
4. Multiple automatic alarm and protection functions to minimize the loss
5. Full packaging process of measuring, feeding, filling, bag forming and date printing, air in/out, counting and finished product conveying in one automatic operation by the machine equipped with measurement device.
6. Bag type: pillow bag, gusset bag and hole punching bag.

♦ Material



♦ Packing Type

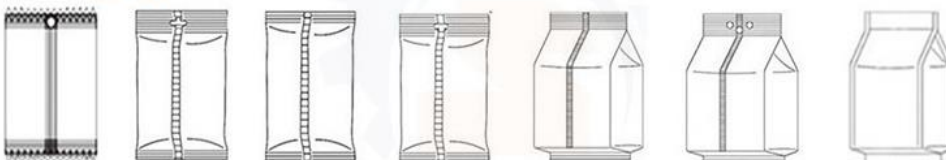

General specifications

PHYSICAL SPECIFICATIONS

Packing Speed	10-50 bpm
Bag Size	20-400(L)*100-300(W)mm
Bag Type	pillow bag, gusset bag, hole punching bag, vacuum bag
Film Width	620mm
Film Thickness	0.04-0.09mm
Film Material	BOPP/CPP,BOPP/VMCPP,BOPP/PE,PET/VMPE,PET/PE
Pulling Belt Type	synchronous servo motor belt film pulling
Air Consumption	0.8Mps 0.6m3/min
Power Supply	single phase 220V 50HZ/60HZ, 4.0KW
Machine Dimension	1,250(L)*1,600(W)*1,700(H)mm
Machine Weight	800kg

PRODUCT DESCRIPTION

High Quality Vertical Packing Machine is suitable for dosing and packaging fluidic or low fluidity materials, like milk powder, albumen powder, rice powder, coffee powder, solid drink, condiment, white sugar, dextrose, food additive, corn powder, icing powder etc. Meanwhile, It is also suitable for dosing and packaging pharmaceuticals, fodder, detergent powder, agriculture pesticide and so on.