

### General specifications




#### PHYSICAL SPECIFICATIONS

X-Ray Tube	210W/ 350W Optional
Inspection Width	650mm
Inspection Height	650mm
Best Inspection	Stainless Steel Ball Φ0.5mm
Sensitivity	Glass/Ceramic Ball Φ1.5mm
Conveyor Speed	10-40m/min
O/S	Windows 10
Protection Method	Soft Curtain
X-Ray Leakage	<1 μSv/h (CE Standard)
IP Rate	IP66 (Under Belt)/ IP69K
Working Environment	Temperature: -5~40C Humidity: 40-60%, No Dew
Cooling Method	Industrial Air Conditioning
Rejecter Mode	Sound and Light Alarm, Belt Stops (Rejecter Optional)
Air Pressure	0.8Mpa
Power Supply	1.5kW
Surface Treatment	Carbon Steel



### Product highlights

- Specialized for the inspection of large size packages like big bags, cartons, boxes, thermoform trays and multipack containers, etc.
- Up to W 650 x H 500mm inspection tunnel without blind area
- Movable touch screen
- Special structure design for big package(carton, box, bag), high price-performance ratio
- Best solution for metal contaminant inspection in big aluminum packages
- Metal component counting function in garments, shoes and bags
- Detection of foreign bodies in garments, shoes and bags with metal accessories.

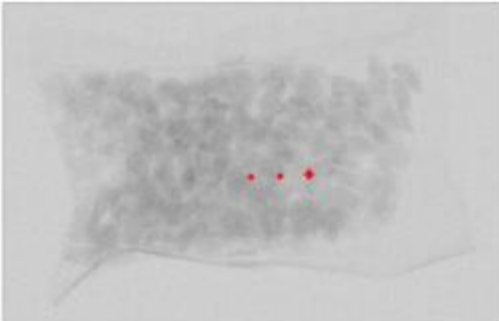

### Images

#### Unpackaged product:



#### Product packaging:



### Dimensions

