



General specifications

Height (mm)	300
Width (mm)	600
Body Length (without rejector)	1500mm
Transmission Speed	30m/min
Sensitivity(mm) without product	FE: 1.5 NFE: 2.0 SUS304: 2.5
Operation	5.5" Touch Screen
Power Supply	AC220/110V±10% 50Hz/60Hz
Alarm	Audible and visual alarm
Rejector	Multi Rejector Selectable
Waterproof Level	IP54/IP66
Product Preset	High-Speed A/D Sampling Module
Operating Requirement	Temperature: 0°C~ 40°C, Humidity: 30%~ 95%
Main Structure	SUS304 Stainless Steel



Product Highlights

User Friendly

- Auto learning function. Store 100 product settings.
- Easily connect with printer, labeling machine etc.
- Data can be stored up to 1 year.

Customizable

- Customizable for rejector system.
- Multiple language available.

High Sensibility & Stability

- The accuracy up to FE 1.5mm, NON-FE 2.0mm, SUS304 2.5mm.
- Strong anti-interference, and minimizing false rejections.


Easy Maintenance

- The conveyor easy dissemble.
- All stainless steel 304 construction.
- Detachable belts design is easy to clean and maintain.

***Remarks:** The technical parameter above namely is the result of sensitivity by inspection only the test sample on the belt. The actual sensitivity would be affected according to the products being inspected

Application:

Bagged snacks, meat, frozen food, plastic bottle drink, toiletries, etc.

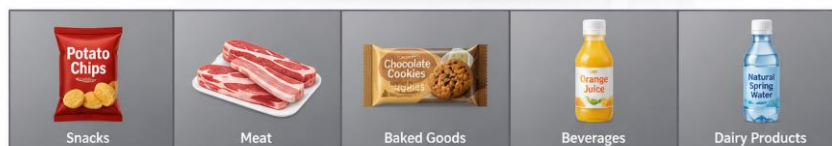

Measurement

